

Fig. 2






Fig. 3

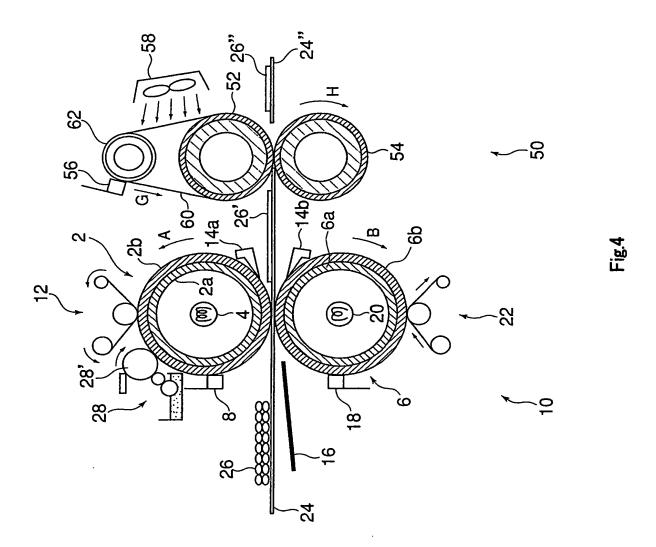

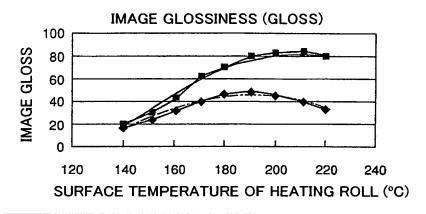

- IN CASE OF USE OF ONLY HEATING AND TEMPORARILY FIXING DEVICE
- IN CASE OF USE OF IMAGE GLOSS CONTROLLER AS WELL (PRESENT INVENTION)

Fig. 5

INFLUENCE OF LOAD OF IMAGE GLOSS CONTROLLER

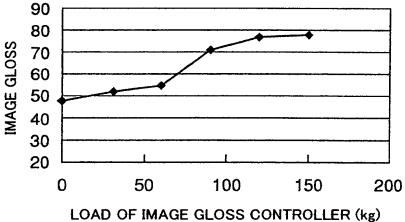


Fig. 6

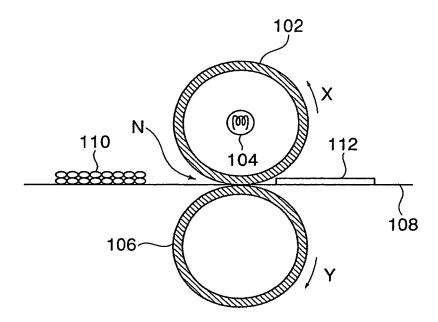
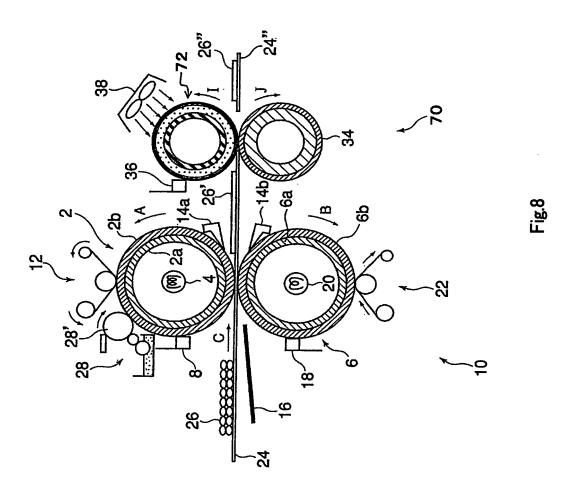


Fig.7




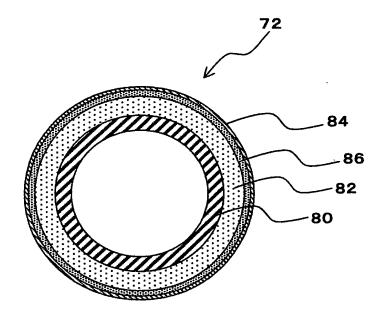


Fig.9

IMAGE GLOSSINESS (GLOSS)

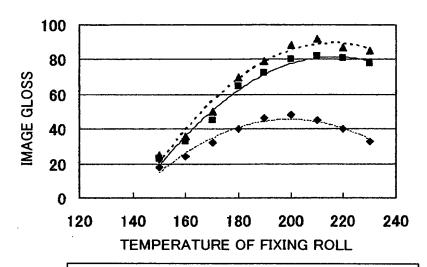

- ♦ IN CASE OF USE OF ONLY FIXING DEVICE
- IN CASE OF USE OF GLOSS CONTROLLER AS WELL
- ▲ IN CASE OF USE OF IMAGE GLOSS CONTROLLER (HARDNESS CONTROL LAYER) AS WELL

Fig. 10